




# Motorola Droid Turbo 2 Back Cover Replacement

Use this guide to remove the back cover of the phone.

Written By: David Lu

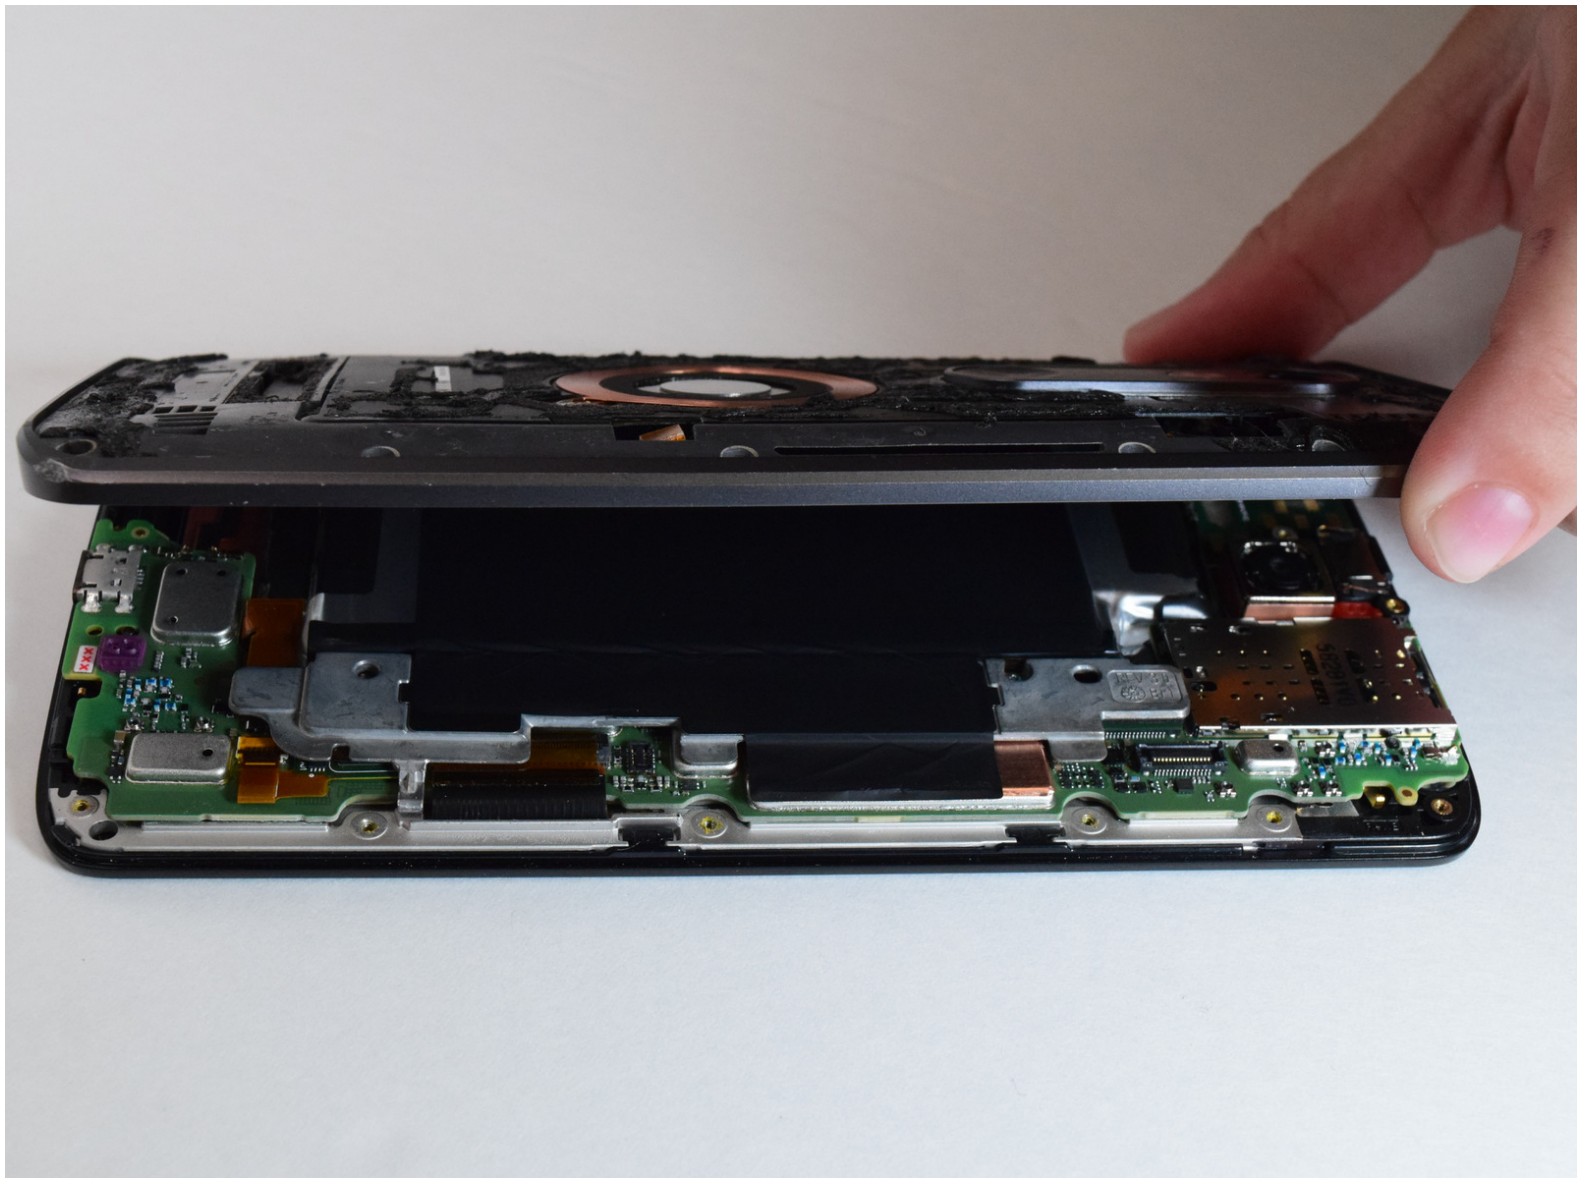

## INTRODUCTION

Follow this guide to remove the back cover of the Droid Turbo 2.


---



### TOOLS:

- [SIM Card Eject Tool](#) (1)
  - [Heavy-Duty Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [T6 Torx Screwdriver](#) (1)
  - [T3 Drillbit](#) (1)
  - [T4 Torx Bit](#) (1)
  - [Precision Tweezers Set](#) (1)
-

## Step 1 — Back Cover

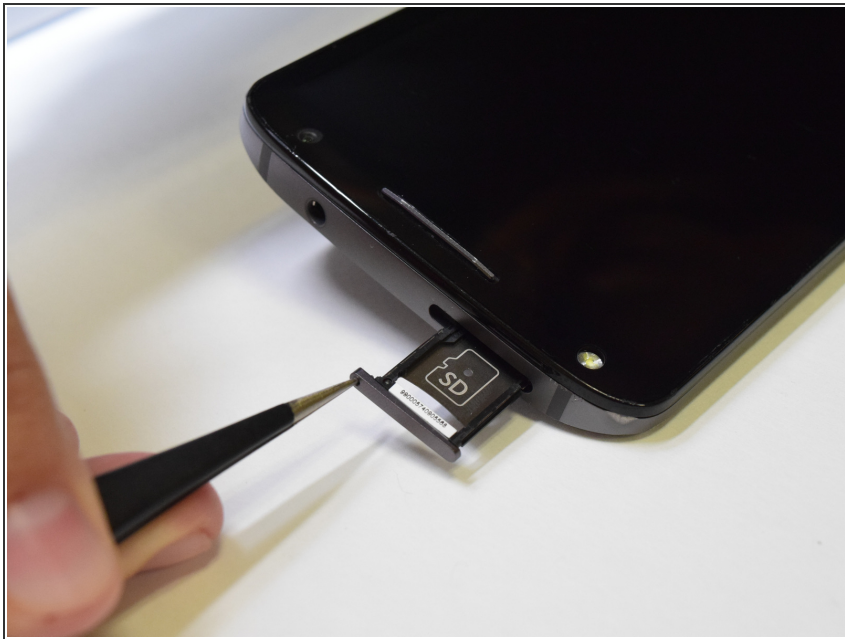

- ❗ Power off your phone before you begin working.
- Pop out the SIM card with pointed tweezers or a SIM card eject tool by gently pushing inwards until the tray pops out.


## Step 2



- Use the spudger to remove the back cover by gently guiding the spudger around the perimeter of the cover.



## Step 3

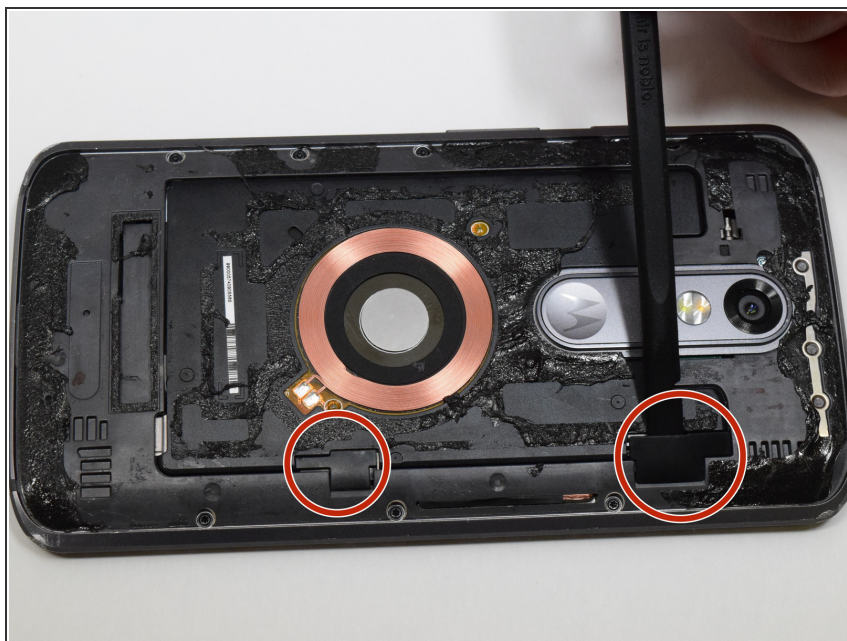


- Use the spudger to gently remove the two plastic covers.

## Step 4



- Under the two plastic covers will be two connectors.
- Use a plastic opening tool to pry up the two connectors. These do not completely come off.


## Step 5

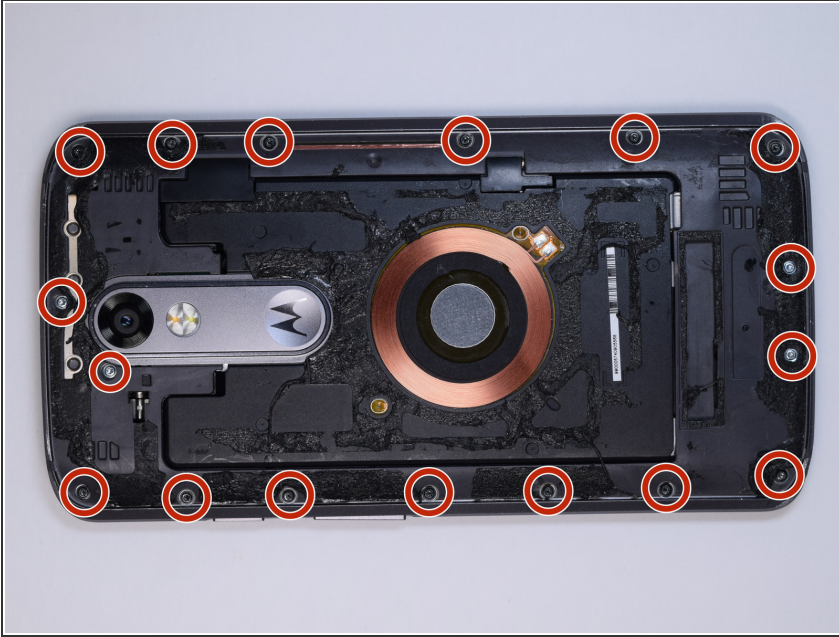

- Remove the 17 screws from the board using a T3 bit on your screw driver. Or, use a T4 bit if the screw is slightly stripped.

**i** The four silver screws on the top and bottom are 4.0mm Phillips #00, and the 13 black screws around the sides are 3.0mm Phillips #00.

## Step 6

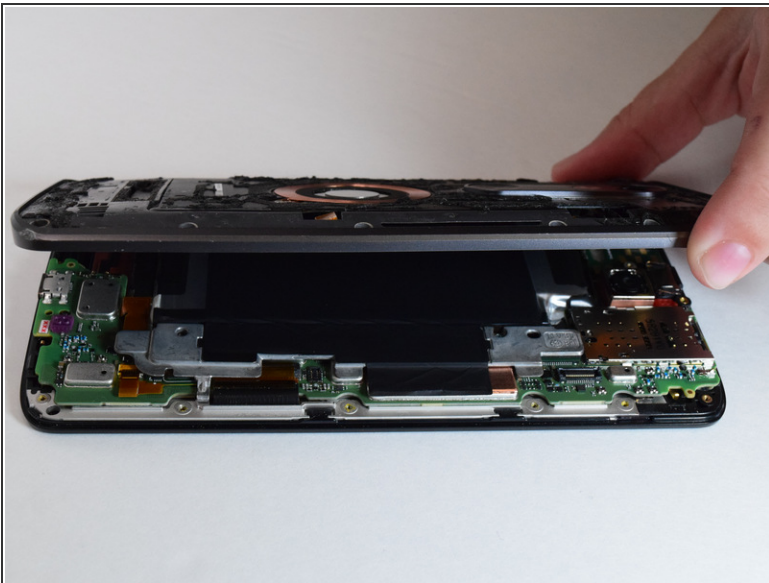

- Remove the back cover from the phone.

**i** The volume and power buttons are likely to fall out of the device when removing the back cover. This is normal.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-21 07:20:53 PM.